


Input Voltage	Output voltage	Output current	Output Power	Efficiency	Dimension
30-60V	24V	10A	240W	97.2%	74*74*32mm

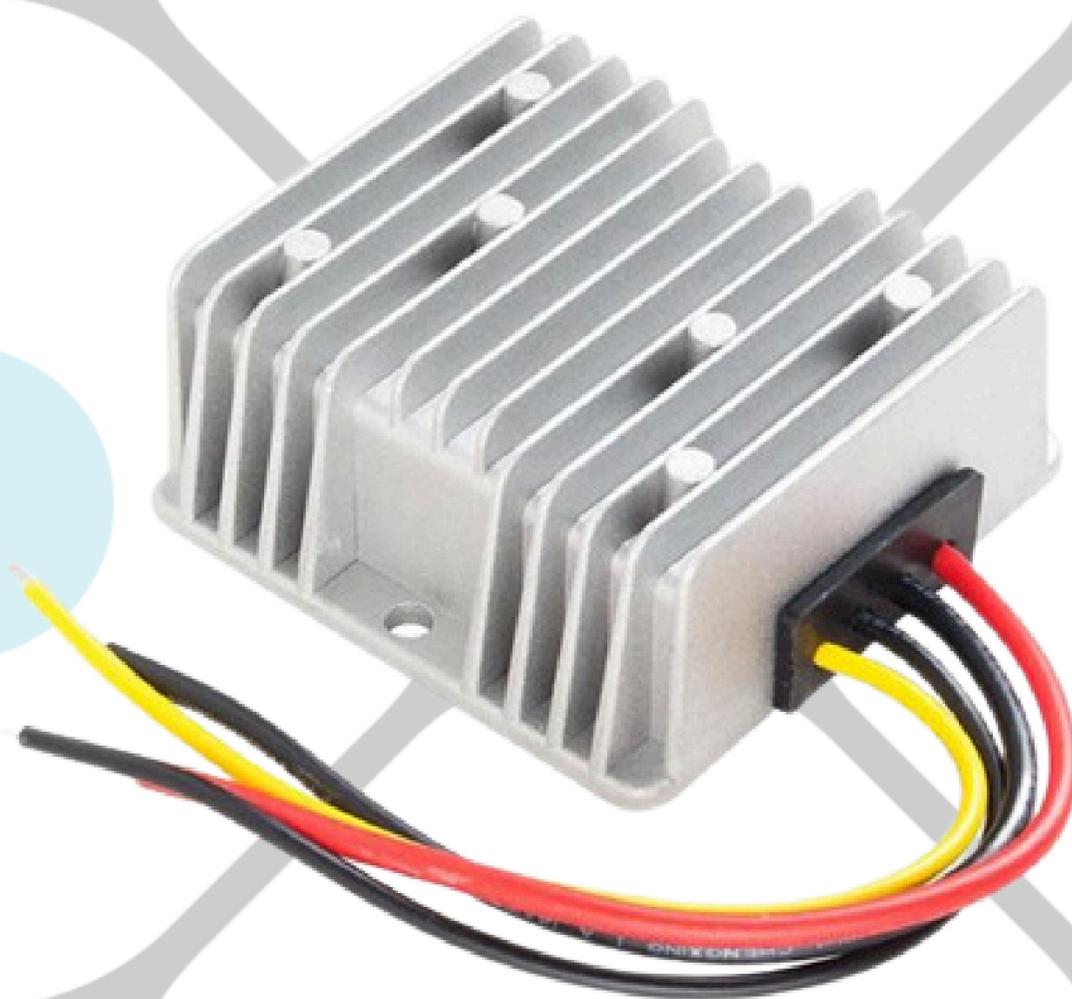

The RW-1228-48-24V-240W is a Non-isolated DC-DC converter that uses a synchronous rectification technology, and features high efficiency and power density. It has the dimensions of 74mm x 74mm x 32mm (2.91 in. x 2.91 in. x 1.26 in) and provides the rated output voltage of 24V and the maximum output current of 10A.

Features

- Design meeting RoHS / CE
- High efficiency: 97.2%(@ 48Vin, 25°C)
- Import capacitors, high reliability
- Support -40 °C environment
- 100% full load burn-in test
- 3 month warranty
- Waterproof level IP68
- Short circuit, Over load, Over temperature protections
- Remote ON/OFF control(optional)
- Output transient absorption protection

Applications

- Industrial
- Alternative Energy
- Golf Cart
- Forklift
- Electromotor
- Telecommunications
- Boat & Yacht
- Medical
- LED Marketplaces and so on

Model naming method

RW-1228-48-24V-240W

RW-1228: SKU NAME
48: Input voltage range
24V: Output voltage
240W: POWER

Datasheet

Parameter	Min	Typ	Max	Units	Remakrs
Absolute maximum ratings					
Operating ambient temperature	-40	-	+50	°C	
Shell ambient temperature	-40	-	80	°C	
Storage temperature	-55	-	100	°C	
Operating humidity	5	-	95	%	Non-condensing
Atmospheric pressure	62	-	106	kpa	
Altitude	-	-	4000	m	
Cooling way	-	-	-		Natural cooling
Input characteristics					
Input voltage	30	48	60	V	
Max. input voltage	-	-	60	V	Continuous
Undervoltage shutdown	26.0	26.2	26.5	V	Automatic recovery
Undervoltage recovery	27.4	27.5	27.7	V	Automatic recovery
Max. input current	-	-	9.2	A	Vin =26.3V; Iout =10A
No load current	-	49	53	mA	Vin =48V
Positive electrode cable	16	-	-	AWG	If the wire length is greater than 50cm, it is recommended to use a thicker wire diameter.
Negative electrode cable	16	-	-	AWG	

Enable PIN cable	/	-	-	AWG	If the product has this feature
Fuse	-	10	-	A	Input positive has built-in fuse
Output characteristics					
Efficiency	-	97.2	-	%	Vin =48V; Iout =10A
Output voltage	27.9	24.0	24.2	V	Vin =48V; Iout =10A
Regulator accuracy	-	±1	-	%	
Voltage regulation	-	±1	-	%	
Load Regulation	-	±1	-	%	
Overvoltage protection	-	--	-	V	@25°C, TVS clamp protection
Output current	0	-	10	A	
Overcurrent protection	14.5	14.7	14.9	A	Vin=48V
External capacitance	0	3000	4000	µF	
Output ripple and noise	-	48	60	mVp-p	Vin =30-60V; Iout=10A, Oscilloscope bandwidth: 20 MHz
Output voltage risetime	-	58	63	mS	
Boot delay time	-	70	80	mS	
Out voltage overshoot	-	1	2	%	Vin =48V, 50%-75%Load step
Over temperatur protection	-	NA	--	°C	Shell temperature, @ 100°C Restoreworking

Short circuit protection	-	-	-		Long-term (4 hours) short circuit is not damaged, Hiccup mode
Positive electrode cable	16	-	-	AWG	If the wire length is greater than 50cm, it is recommended to use a thicker wire diameter.
Negative electrode cable	16	-	-	AWG	
Safety and EMC features					
Anti-electric Strength	Input to Output	-	V	Leakage current \leq 3.5mA, 1min, no breakdown, no arcing	
	Input to Shell	≥ 500	V		
	Output to Shell	≥ 500	V		
Insulation resistance	Input to Output	≥ 50	M Ω	Test voltage = 500V	
	Input to Shell				
	Output to Shell				
Other characteristics					
Weight	≤ 290	g			
Package	white box				
MTBF	$\geq 200,000$	H	Vin= 48V; Iout= 10A		
Switching frequency	220 \pm 10	KHz			

Characteristic Curves

Conditions: $T_A = 25^\circ\text{C}$ (77°F), $V_{in} = 48\text{V}$, $V_{out} = 24\text{V}$, unless otherwise specified

Figure 1, Efficiency

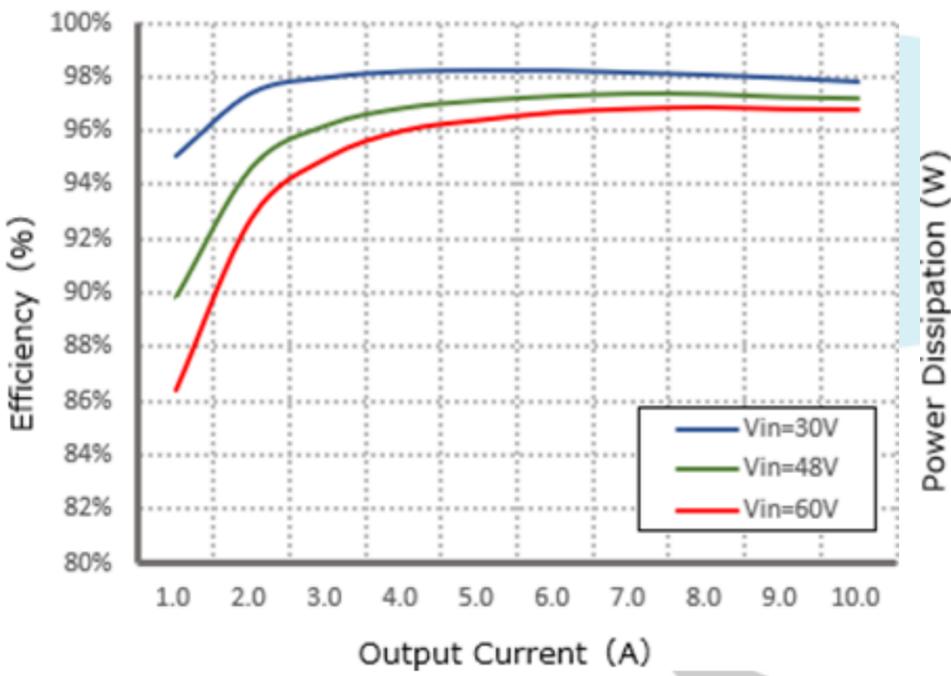


Figure 2, Power dissipation


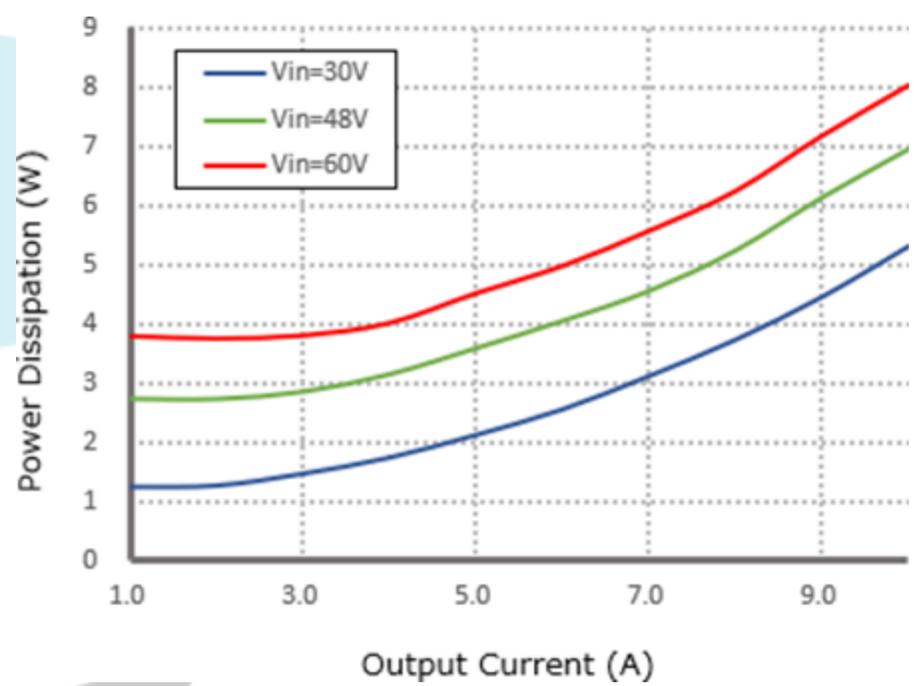


Figure 3, Input V-I, $I_{out}=10\text{A}$

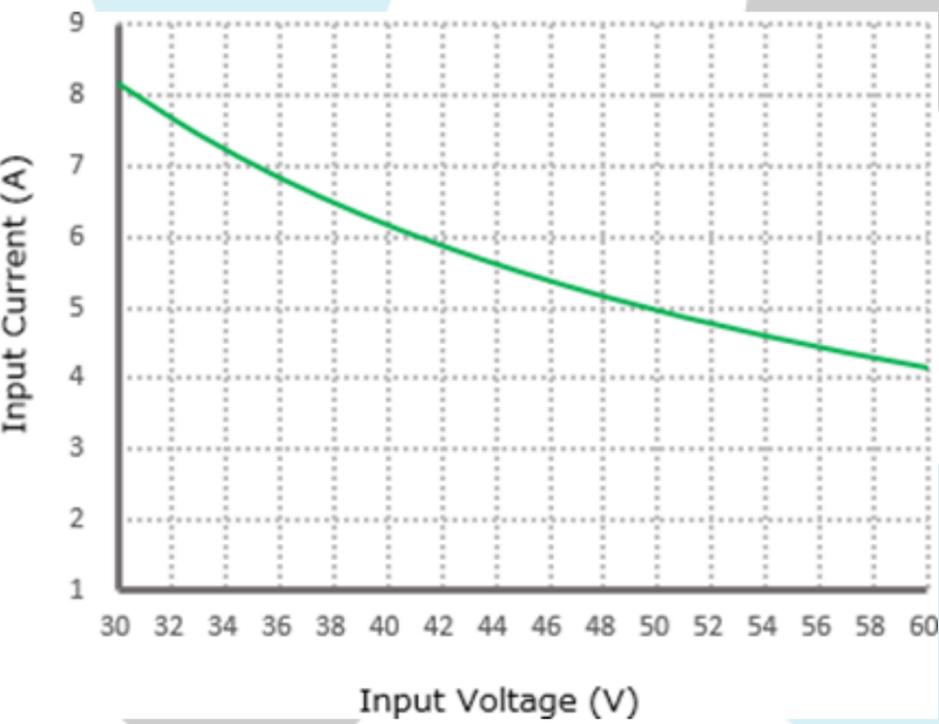

Typical Waveforms

Conditions: TA = 25°C (77°F), Vin = 48V, unless otherwise specified.

Figure 4, 25% - 50%load dynamic

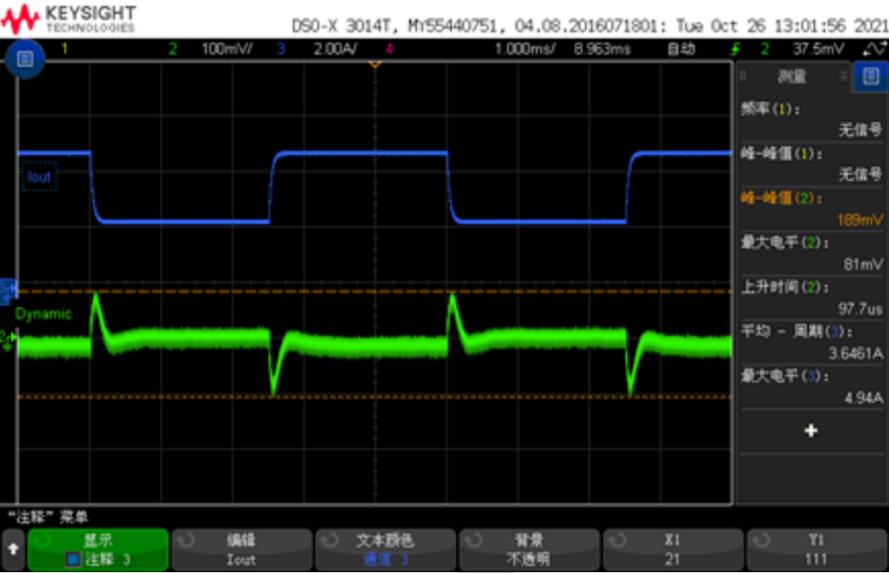


Figure 5, 50% - 75%load dynamic

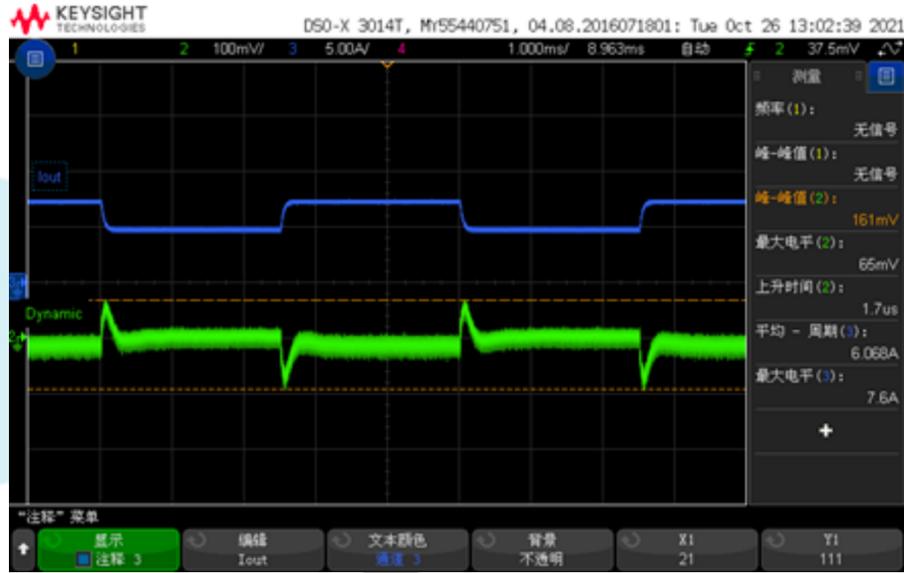


Figure 6, Output voltage established (Iout = 10A)

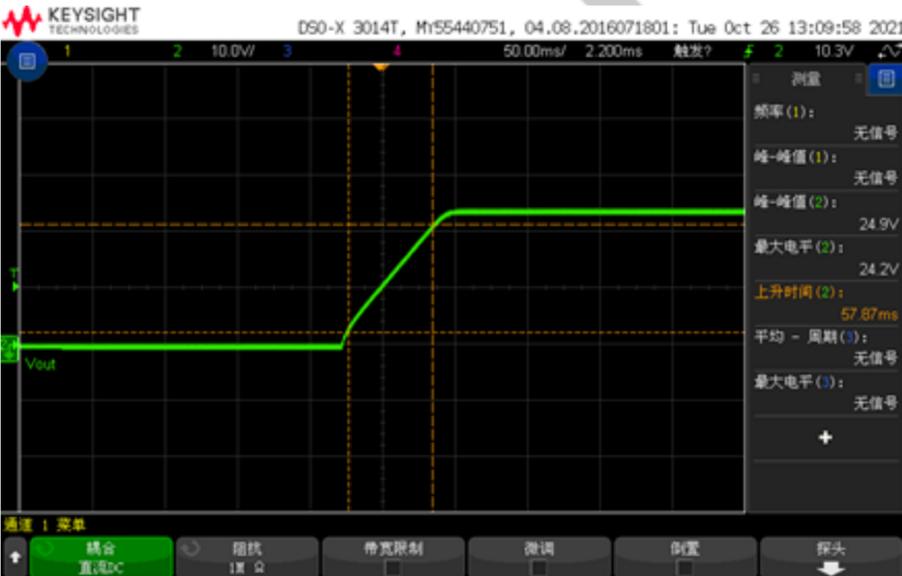


Figure 7, Output ripple & noise (Iout = 10A)

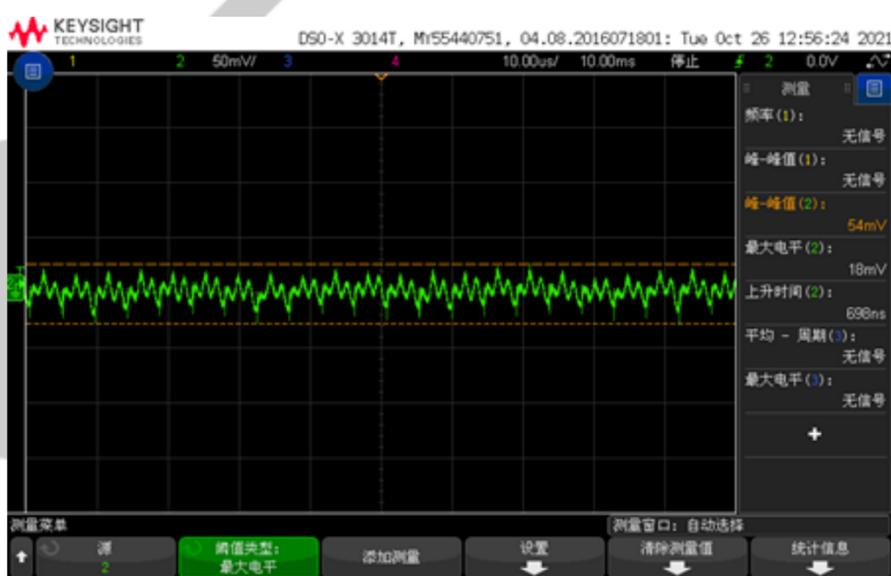


Figure 8, Boot delay time


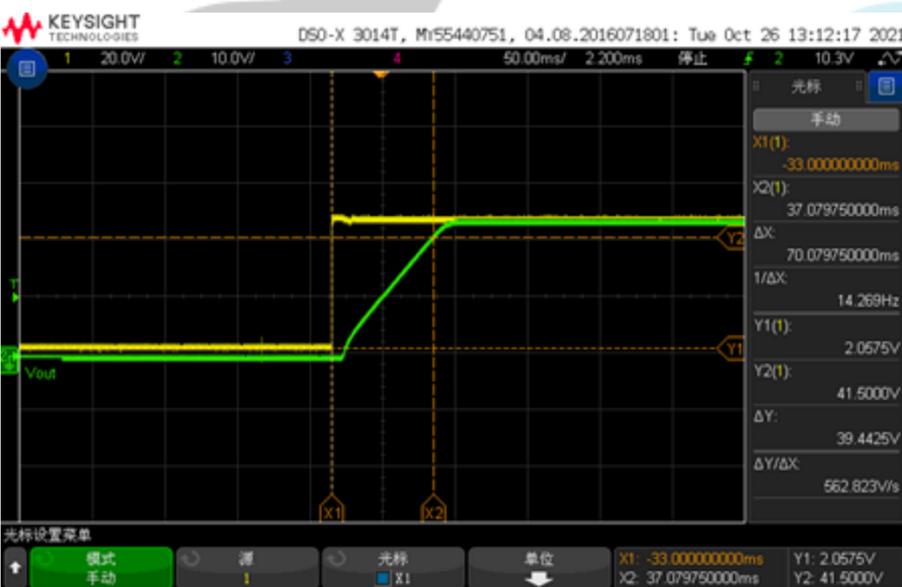


Figure 9, Short circuit & Output voltage

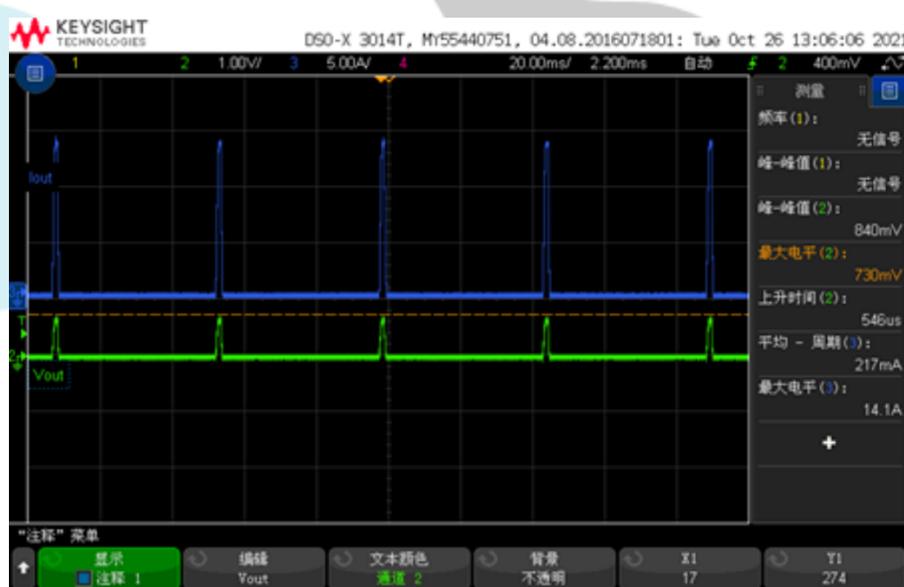

Feature Description


Remote On/Off (EN) (Optional)

Logic Enable	Low level (0-28Vdc)	High level (28-60dc)	Left open
positive logic	Off	On	Off


Input Undervoltage Protection

The converter will shut down after the input voltage drops below the under-voltage protection threshold for shutdown. The converter will start to work again after the input voltage reaches the input under voltage protection threshold for startup. For the Hysteresis, see the Protection characteristics.

Various circuits for driving the EN

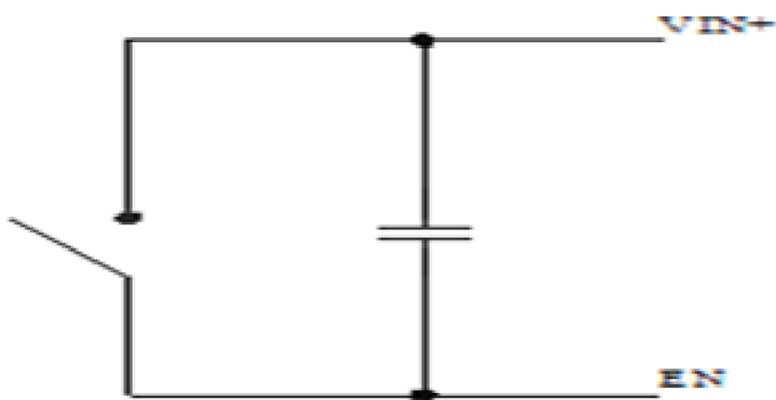

Simple control

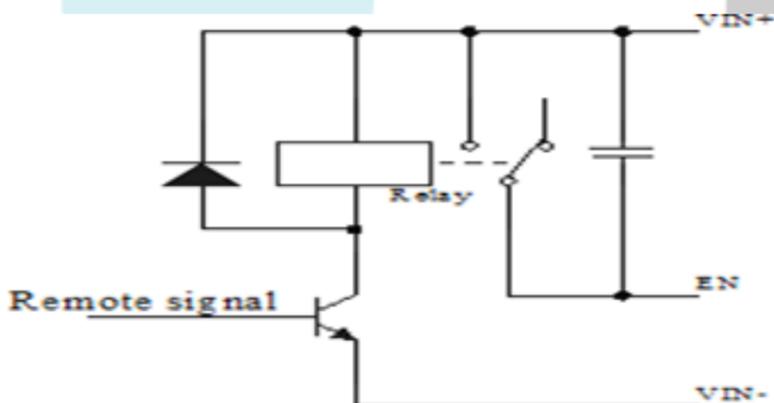

Transistor control

Overtemperature Protection

A temperature sensor on the converter senses the average temperature of the module. It protects the converter from being damaged at high temperatures. When the temperature exceeds the over temperature protection threshold, the output will shut down. It will allow the converter to turn on again when the temperature of the sensed location falls by the value of Over temperature Protection Hysteresis

Output Overcurrent Protection

The converter equipped with current limiting circuitry can provide protection from an output overload or short circuit condition. If the output current exceeds the output overcurrent protection set point, the converter enters hiccup mode. When the fault condition is removed, the converter will automatically restart

Wiring Instructions

The input and output of this product is terminals. The user should ensure that the input and output wires and terminals are connected reliably, and pay attention to the wire diameter to meet the requirements of the power supply current. If the cable to be used is long, it needs Considering the voltage drop of the wire, if the voltage drop is too large, the voltage output at the load end may not meet the load demand. In this case, consider using a thicker wire diameter or reducing the length of the wire. Generally, if long wiring is required. Long line should be used on the side where the current is relatively small. For example, this product is a step-down product, so long lines should be used on the input side

Thermal Consideration

Sufficient airflow should be provided to help ensure reliable operating of the RW-1228-48-24V-240W. Therefore, thermal components are mounted on the top surface of the RW-1228-48-24V-240W to dissipate heat to the surrounding environment by conduction, convection, and radiation. Proper airflow can be verified by measuring the temperature at the middle of the base plate.

