


Input Voltage	Output voltage	Output current	Output Power	Efficiency	Dimension
30-75V	12V	15A	180W	95%	74*74*32mm

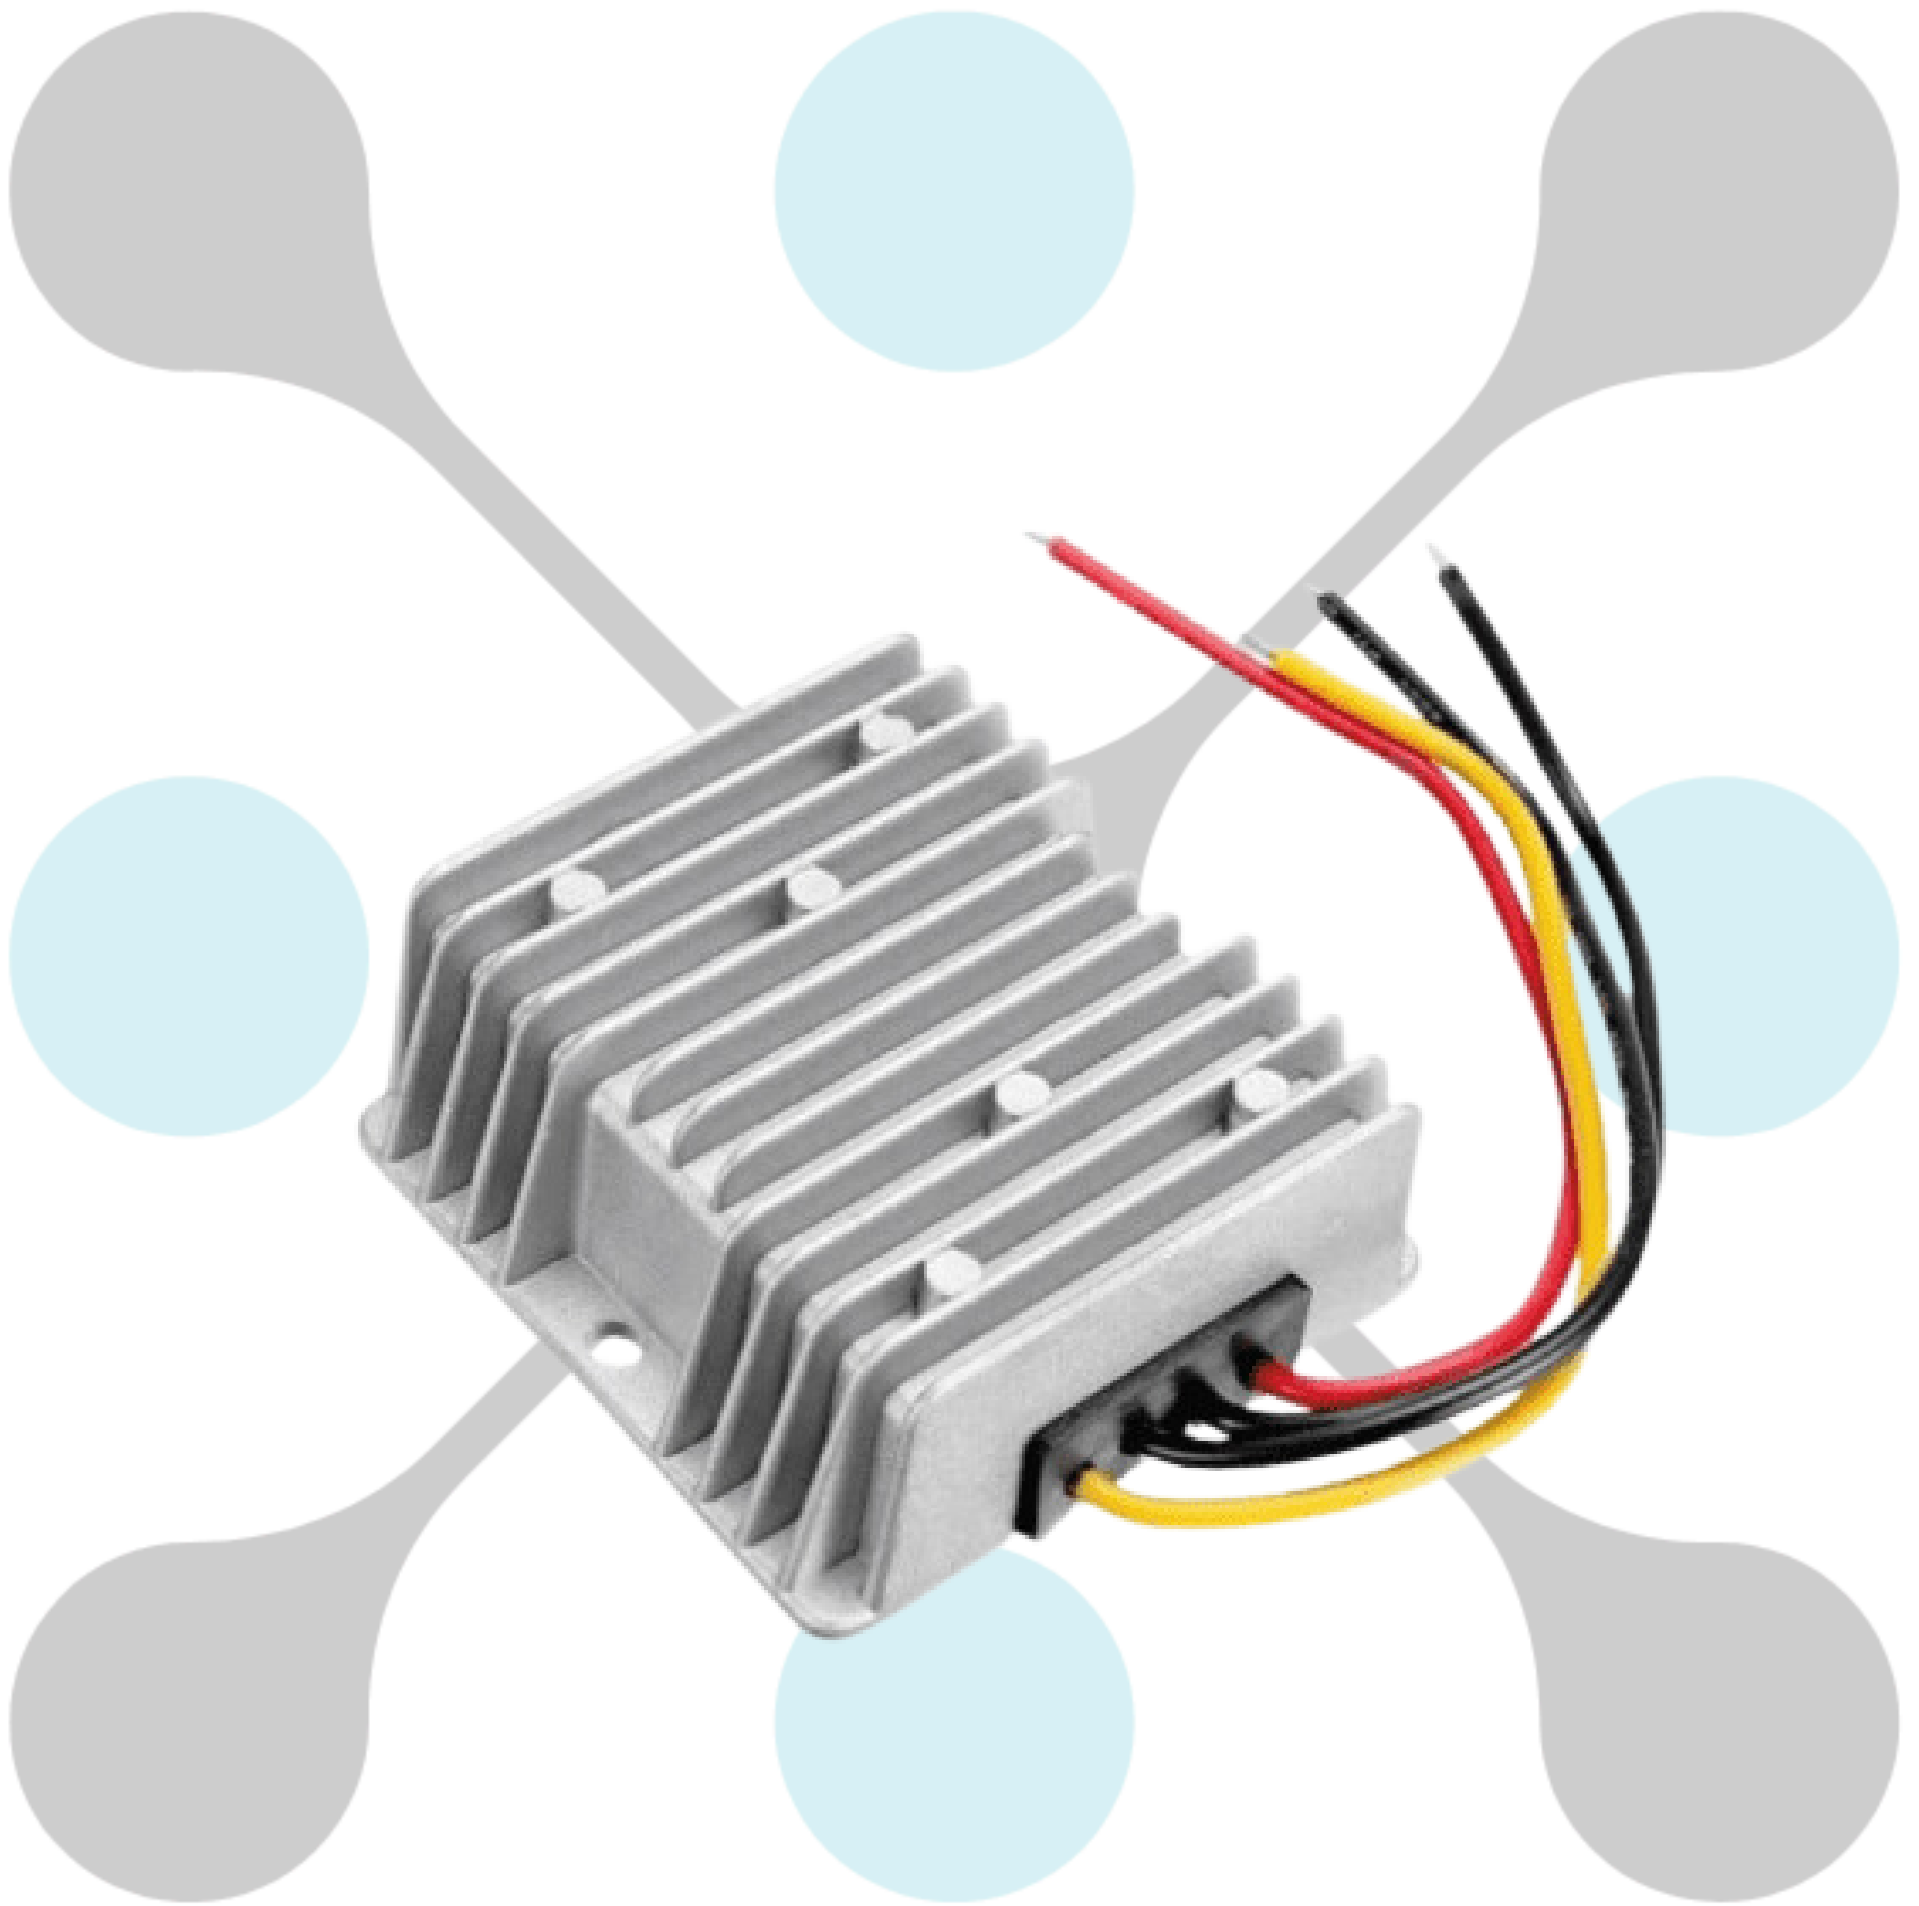

Features

- Design meeting RoHS / CE
- High efficiency: 95% (@ 60V input)
- Non-isolated between input and output
- Internal capacitor, high reliability
- 100% full load burn-in test
- 3 month warranty
- Waterproof level IP68
- Over load, Over temperature and Over voltage protections

Applications

- Industrial
- Alternative Energy
- Golf Cart
- Military
- Electromotor
- Telecommunications
- Boat & Yacht
- LED Marketplaces and so on

Model naming method

RW-998-60-12V-180W

RW-998: SKU NAME
60: Input voltage range
12V: Output voltage
180W: POWER

Datasheet

Model	RW-998-60-12V-180W		
Input	Rated voltage	V	60
	Voltage range	V	30-75
	Efficiency (type)	%	95 @ 60V input
	Positive cable (red)	AWG	16 @ 15cm length
	Negative cable (black)	AWG	16 @ 15cm length
Output	Voltage	V	12
	Max. rated current	A	15
	Max. rated power	W	180
	Voltage regulation	%	±1
	Load regulation	%	2
	No load loss	mA	70 @ 60V input
	Ripple & noise	mV	120 (full load)
	Positive cable (white)	AWG	16 @ 15cm length
	Negative cable (black)	AWG	16 @ 15cm length

Environment	Working temperature	°c	-40 ~ +80
	Working humidity	RH	10% ~ 90%
	Storage temperature	°c	-40 ~ +100
Function	Short circuit protection		YES
	Over current protection	A	YES
	Waterproof		IP68
	Over temperature protection		YES
	Over voltage protection		YES
Mechanical	Weight	g	300
	Size	mm	74*74*32
Other	Cooling		Free air convection
	Packaging		White box

