


Input voltage	Output voltage	Output current	Output power	Efficiency	Size
18-36V	12V	5A	60W	95%	52x49x20mm

The GESPSD241210 is a non-isolated DC-DC converter that uses a synchronous rectification technology, and features high efficiency and power density. It has the dimensions of 52x49x20mm and provides the rated output voltage of 12V and the maximum output current of 5A.

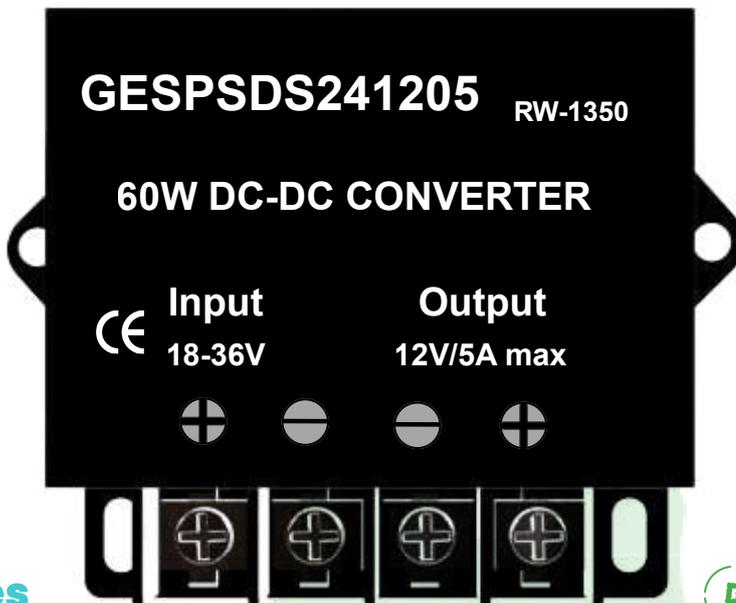

Features

- Design meeting RoHS / CE
- High efficiency:95% (@24Vin)
- Import capacitors, high reliability
- Output transient absorption protection
- Support -40 °C environment
- 100% full load burn-in test
- 3 month warranty
- Remote ON/OFF control (optional)
- Waterproof level IP65
- Undervoltage, short circuit, overload protection

Model naming method

GESPSDS241205

Applications

- Industrial
- Alternative Energy
- Golf Cart
- Forklift
- Electromotor
- Telecommunications Boat & Yatch
- Medical
- Led Marketplace & So On

GE : G-energy

S : Screw Terminal

P : Plastic Body

SD : Step Down

24 : 24V Input Voltage

12 : 12V Output Voltage

05 : 5A Max Current

Electrical Specifications


Conditions: TA=25°C(77°F), Airflow= 1 m/s (200LFM), Vin =24V Vout =12V, unless otherwise specified

Parameter	Min.	Typ	Max.	Units	Remarks
Absolute maximum ratings					
Operating ambient temperature	-40	-	+50	°C	
Shell ambient temperature	-40	-	80	°C	
Storage temperature	-55	-	100	°C	
Operating humidity	5	-	95	%	Non-condensing
Atmospheric pressure	62	-	106	Kpa	
Altitude	-	-	4000	m	
Cooling way	-	-	-		Natural cooling

Input characteristics

Input voltage	18	24	36	V	-
Max. input voltage	-	-	36	V	Continuous
Undervoltage shutdown	17	17.25	17.5	V	Automatic recovery
Undervoltage recovery	17.5	17.75	18	V	Automatic recovery
Max. input current	-	-	3.5	A	Vin =18V; Iout =5A
No load current	-	0.8	1	mA	Vin = 24V

Positive electrode cable	18	-	-	AWG	If the wire length is greater than 50cm, it is recommended to use a thicker wire diameter.
Negative electrode cable	18	-	-	AWG	
Enable PIN cable	22	-	-	AWG	None
Fuse	-	10	-	A	

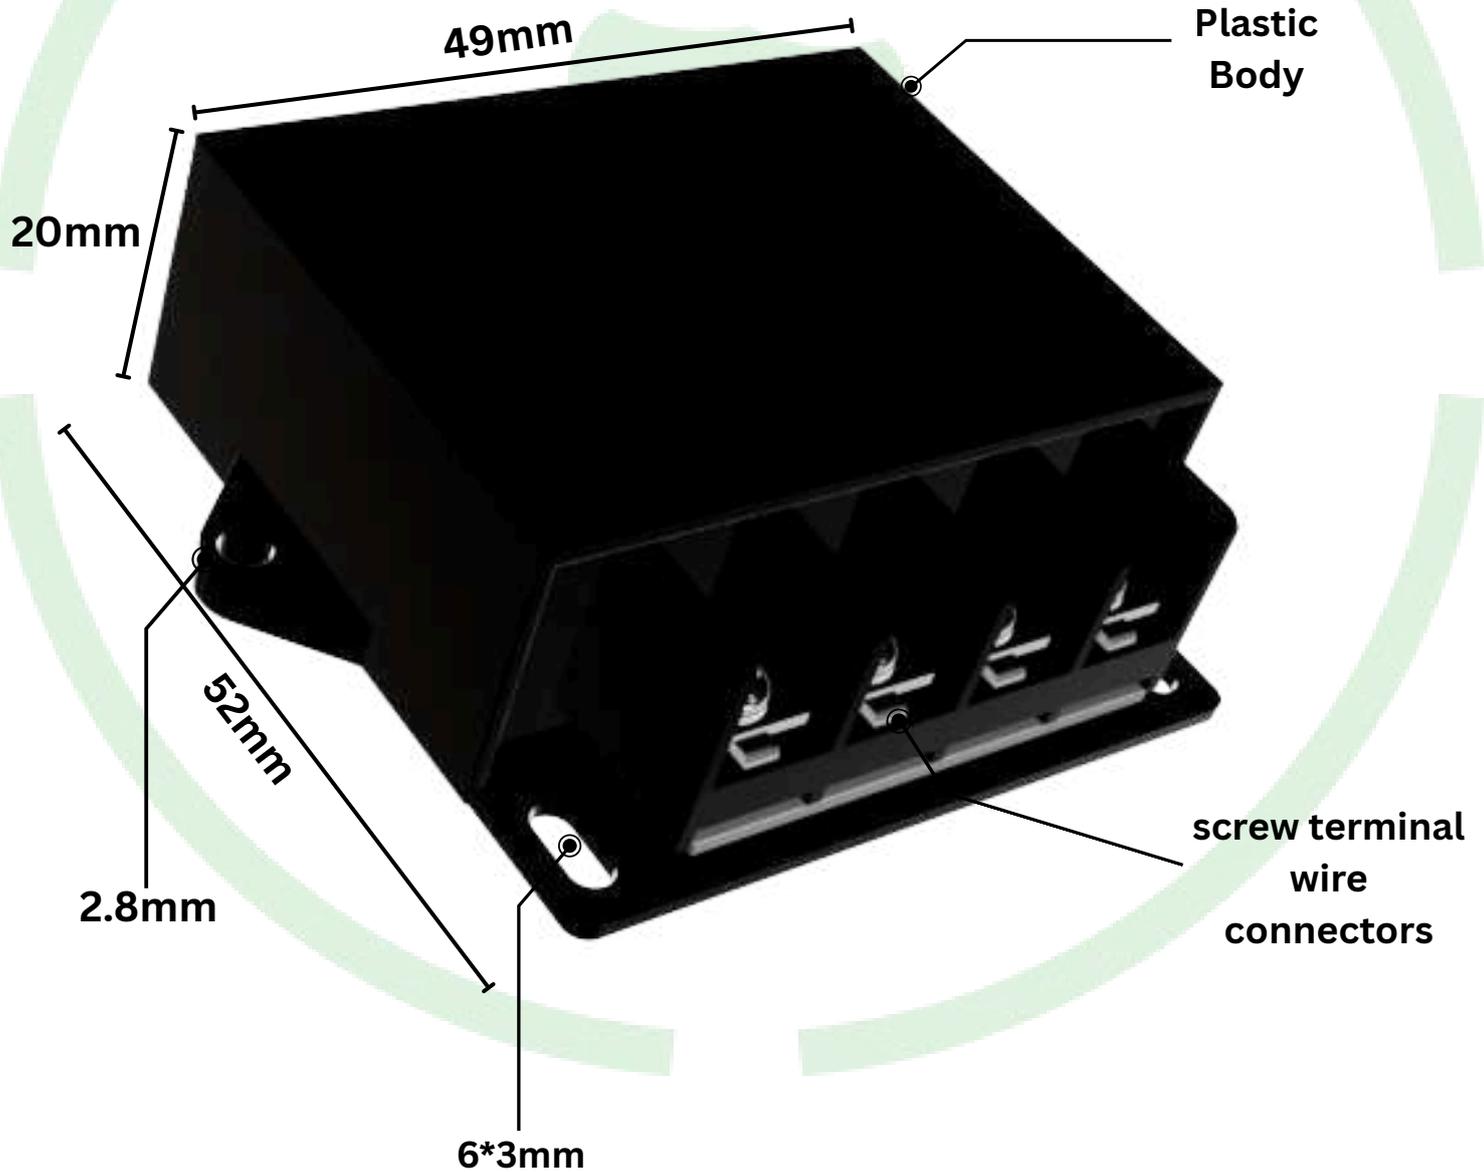

Output characteristics

Efficiency	-	95	-	%	Vin =24V; Iout =5A
Output voltage	11.85	12	12.15	V	Vin =24V; Iout =5A
Regulator accuracy	-	±2	-	%	
Voltage regulation	-	±2	-	%	
Load Regulation	-	±3	-	%	
Oversvoltage protection	-	-	-	V	
Output current	-	-	5	A	
Overcurrent protection	7	7.5	8	A	
External capacitance	-	-	-	μF	
Output ripple and noise	-	16	120	mVp-p	Vin =18-36V; Iout=5A, Oscilloscope bandwidth: 20 MHz
Output voltage rise time	-	3.1	4.0	mS	
Boot delay time	-	120	150	mS	
Out voltage overshoot	-	1	2	%	
Over temperature protection	-	-	-	°C	shell
Short circuit protection	-	Yes	-		Long-term (4 hours) short circuit is not damaged, Hiccup mode
Positive electrode cable	18	-	-	AWG	If the wire length is greater than 50cm, it is recommended to use a thicker wire diameter.
Negative electrode cable	18	-	-	AWG	

Feature Description


Remote On/Off (EN) (Optional)

Logic Enable	Low level (0-18Vdc)	High level (18-36Vdc)	Left open
Positive logic	Off	On	Off

Input Undervoltage Protection

The converter will shut down after the input voltage drops below the under-voltage protection threshold for shutdown. The converter will start to work again after the input voltage reaches the input under voltage protection threshold for startup. For the Hysteresis, see


Various circuits for driving the EN

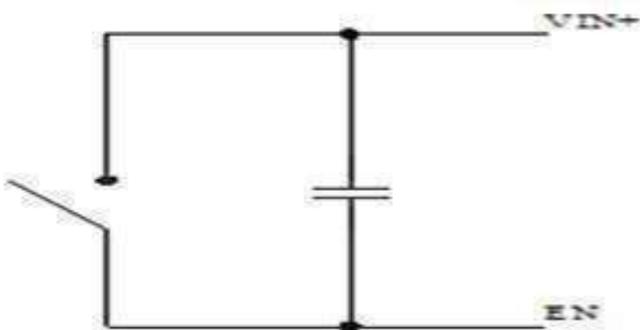

Simple control

Output Overcurrent Protection

The converter equipped with current limiting circuitry can provide protection from an output overload or short circuit condition. If the output current exceeds the output overcurrent protection set point, the converter enters hiccup mode. When the fault condition is removed, the converter will automatically restart.

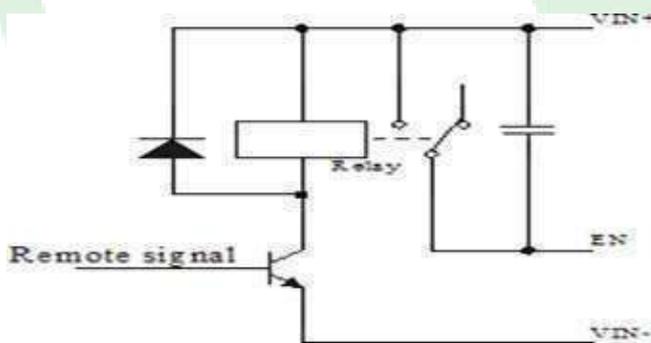

Transistor control

Wiring Instructions

The input and output of this product is terminals. The user should ensure that the input and output wires and terminals are connected reliably, and pay attention to the wire diameter to meet the requirements of the power supply current. If the cable to be used is long, it needs Considering the voltage drop of the wire, if the voltage drop is too large, the voltage output at the load end may not meet the load demand. In this case, consider using a thicker wire diameter or reducing the length of the wire. Generally, if long wiring is required. Long line should be used on the side where the current is relatively small. For example, this product is a step-down product, so long lines should be used on the input side.

Safety and EMC features

Anti-electric Strength	Input to Output		V	Leakage current $\leq 3.5\text{mA}$, 1min, no breakdown, no arcing
	Input to Shell	≥ 500	V	
	Output to Shell	≥ 500	V	
Insulation resistance	Input to Output	≥ 10	$\text{M}\Omega$	Test voltage = 500V
	Input to Shell			
	Output to Shell			

Other characteristics

Weight	≤ 60	g	
Package	White box		
MTBF	$\geq 200,000$	H	$V_{in} = 24\text{V}; I_{out} = 5\text{A}$
Switching frequency	135 ± 10	KHz	

Characteristic Curves

Conditions: $T_A = 25^\circ\text{C}$ (77°F), $V_{in} = 24\text{V}$, $V_{out} = 12\text{V}$, unless otherwise specified

Figure 1, Efficiency


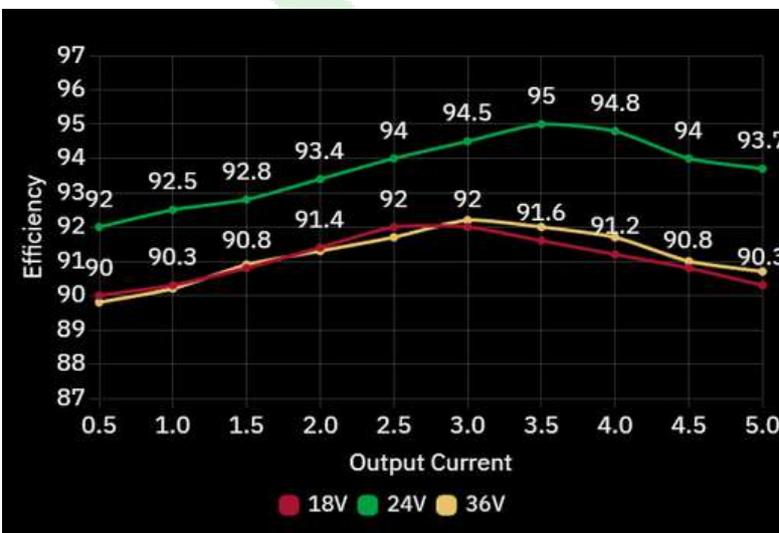


Figure 2, Input V-I, $I_{out} = 5\text{A}$



Thermal Consideration

Sufficient airflow should be provided to help ensure reliable operating of the GESPSDS241205. Therefore, thermal components are mounted on the top surface of the GESPSDS241205 to dissipate heat to the surrounding environment by conduction, convection, and radiation. Proper airflow can be verified by measuring the temperature at the middle of the base plate.

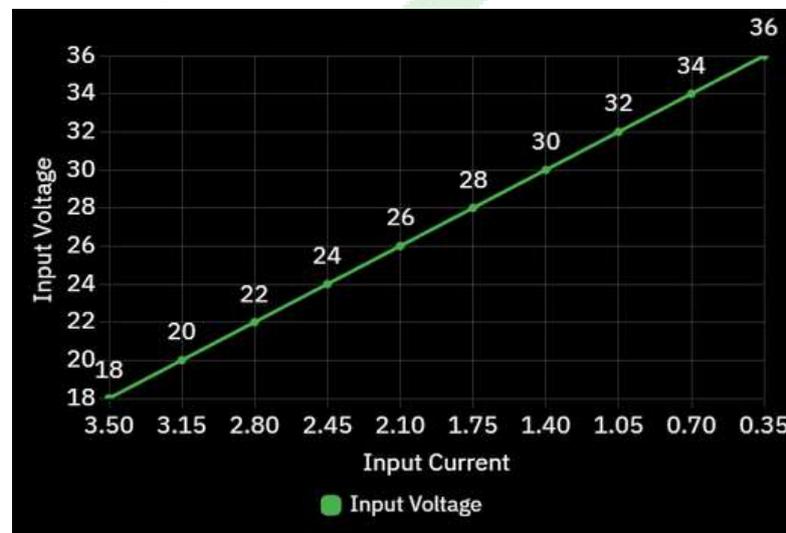